

ABRASIVE BLASTING MACHINES TYPE 50-LITER (Remote Control in option)

Standard delivery : capacity tank, screen, cap, sand valve (1520), high-performance moisture separator(1320), inspection door,



High performance, simple operation, low price. Areas of use: High performance abrasive blasting of metal constructions and buildings, bridges, reservoirs, piping, concrete surfaces. Cleaning up to grade SA-3,0. Performance up to 37 m²/h (see Table of Performance). Designed for working with : Any dry abrasives, max. grain size 3,5 mm.

STANDARD DELIVERY :


A. The abrasive blasting machines are equipped on standard delivery with a highly efficient moisture separator (1320) to prevent the entry of moisture and oil from the compressor into the tank. This is especially necessary when using old compressors, or working at low temperatures or at a large distance from the compressor. The filter eliminates up to 98% of the condensate and oil from compressed air. This prevents work stoppages in connection with the removal of dampened abrasive from the tank.

B. The Abrasive Valve (1520) is used to provide precise metering of the abrasive. It is especially suited for harsh abrasives.



OPTIONAL EQUIPMENT :

1. Remote control device (1250) with a pneumatically-operated main Valve, deadman handle (1200), 5 meter twin-line hose, hose fittings.
2. Blasting lance Ø19x32 length 5 meter (8023), tungsten carbide nozzle tungstène Ø5 (7250) and hose fittings.

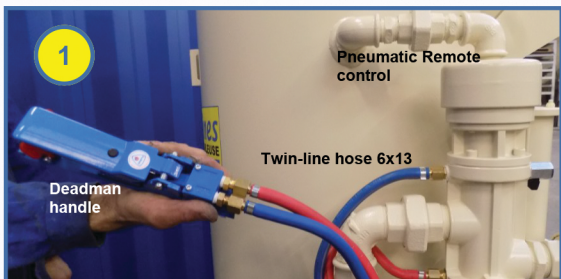

TECHNICAL DATA :	50 liter
Max. working pressure , bar	12
Tank capacity , liter	50
Working temperature , °C	-10 / 50
Tank diameter , mm	359
Tank height , mm	1125
Weight , kg	73

PERFORMANCE TABLE						
Nozzle diameter, mm		6,5	8,0	9,5	11,0	12,5
Air consumption in m ³ /min by 7 bar		4,3	6,8	8,9	11,6	15,4
Average performance in m ² /h	SA 2	10	15	21	28	37
	SA 2 1/2	5	9	14	21	28
	SA 3	4	6	9	13	17
Average abrasive consumption in kg/m ²	SA 2	40	35	32	29	28
	SA 2 1/2	58	51	46	42	40
	SA 3	78	68	62	56	54

REQUIRED AIR VOLUME (m ³ /min.)				
Nozzle diameter, (mm)	Air consumption (m ³ /min.)	Air consumption helmet (m ³ /min.)	Plus 50% reserve (m ³ /min.)	Minimum air volume required (m ³ /min.)
6.5	2.5	0.5	1.3	4.3
8.0	4.2	0.5	2.1	6.8
9.5	5.6	0.5	2.8	8.9
11.0	7.4	0.5	3.7	11.6
12.5	9.9	0.5	5.0	15.4